




## Description

Bench style seat, without backrest, of two parts: seat and connection bridges, to form benches without length limit. For conventional and metallic grandstands (telescopic or dismountable). Manufactured in copolymer polypropylene, UV stabilized, shiny surface, sealed around the whole of its perimeter to prevent dirt from accumulating inside the seat, easy cleaning. Rounded front edge of the seat to improve its comfort.

Fixing with one anchoring point in each bridge, mounted directly on step.

Optional metallic bench is made in cold laminated steel tube S-275-JR and/or S-235-JR, hot galvanized at 450º (option cataphoretic + powder paint coating). (For bench information, please contact commercial department).

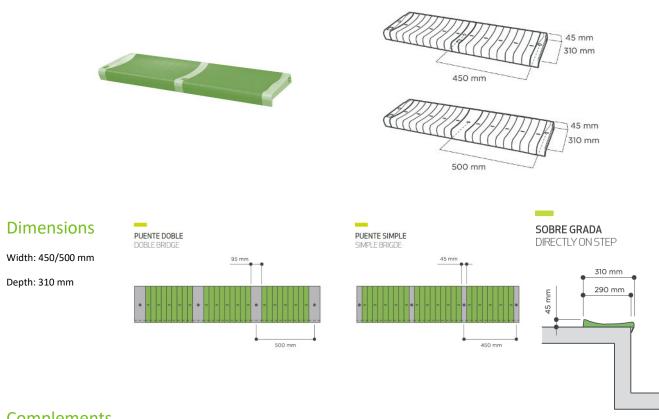

## Complements

#### **NUMBERING (Optional)**

Vandal-resistant: anti-vandal adhesive numbering plates 40x20 mm.



## Mechanical strength

Mechanical resistance according to UNE-EN 12727 "Aligned Seats. Strength and Durability Requirements"

Tests are performed at level 4, the maximum, for heavy use.

#### Fire resistance level

UNE-EN 1021 Part 1 & 2 (please contact commercial department for other fire certifications).

#### **UV** Resistance


Light stabilizer for polypropylene that protects the material from degradation caused by solar radiation and other atmospheric agents, prolonging the useful life of the product.

Masterbatches for injection of polypropylene with high resistance to light and temperature.

Resistance according to European Standard EN ISO 4892-2 and average colour variation dE<5 (CIELAB colour space)\*.

\* Exposure in test: 2300 hours according to UNE-EN 13200-4

## ISO 9001 Quality and ISO 14001 Environmental







# FIBA (International Basketball Federation) APPROVED EQUIPMENT



